

## **D8024S SERIES** **Overhead Size 2-4 Door Closers-CE Marked**




### STANDARD FEATURES

- **Certification:** CE Marked
- **Tested to EN1634:** WF Assessment Report No.:502523  
WF Test Report No.:503361/R
- **Spring Power:** Adjustable Size 2-4
- **Durability:** 500,000 cycles above
- **Function:** Adjustable Closing speed  
Adjustable Latching speed  
Hold Open Optional
- **Installation type:** Regular, Top Jamb, Parallel
- **Max. Opening:** 120-150 °
- **Max. Door Weight:** 100kgs
- **Max. Door Width:** 1100mm
- **Pressure relief valve:** Yes
- **Mechanism:** Rack & Pinion
- **Hand of door:** Non handed
- **Materials of Body:** Die-cast Aluminum
- **Materials of Spring :** 60Si2Mn
- **Backcheck:** Yes
- **Delayed Action:** Yes
- **Bearing:** Full complement bearings for long durability
- **Application:** Suitable for interior wood, hollow metal, and aluminum doors and frames
- **Finish:** Silver, Brown, White, Black, Others upon request.
- **Warranty:** 5 Years
- **Cross reference** Dorma 7300

**AVAILABLE INSTALLATION TYPE:**

**The 3 methods for installing over head door closers**

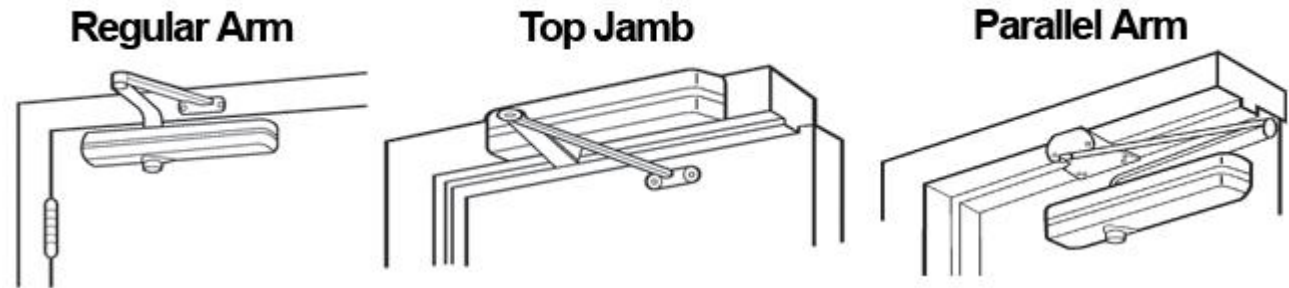

Model #	Spring power	Recommended Door Weight	Recommended Max. Door Leaf Width (mm )	Notes
D8024S	2-4	20-100 KGS	1100 mm	

\*In case of unusually high or heavy doors, windy or draughty conditions, or special installations, a large power size of door closer should be used.

**PRODUCT DIMENSIONS:**

